

emco group

Designed for your profit



HYPERTURN 65

High-performance turn-mill centers for serial production of complex parts made from bar stock or as auto-loaded chucker parts.

TURNING
EMCO-WORLD.COM

HYPERTURN 65-1000

1 MAIN SPINDLE

- Integrated, water-cooled spindle motor
- Spindle nose A2-6 (A2-8)
- High drive power 29 (37) kW
- High torque 250 (360) Nm
- Large speed range 0 - 5000 (4000/3500) rpm
- Bar capacity diameter 65 (76/95) mm

2 TOOL SYSTEM 1 / 2

- 12-station tool turret
- VDI30 (VDI40) quick-change system
- 12 driven tool stations
- Optional with BMT55P turret
- Servo-controlled
- Rigid tapping
- Polygonal turning, etc.

3 Y-AXES 1 / 2

- Travel +/- 50 mm
- Stable, compact construction
- Largely spaced guide ways
- Wedge-style design

4 WORK AREA

- Large spindle distance 1050/1300 mm
- Optimum accessibility
- Straight chip drop
- Stainless steel covers and linings
- Tailstock/steady rest function on lower turret



Machine with optional equipment



Eccentric flange
(Steel 42 Cr Mo 4)



Adapter
(Steel Ck 45)

0 / 1300 DUOTURN

The HYPERTURN 65 is a new development in the HYPERTURN range. Its smart modular design means it perfectly meets specific customer requirements. Two identical high-performance spindles set the basis for unlimited machining. Two turrets on the cross slide with optional Y-axis to ensure greater productivity. Each position on the tool turret can accommodate both stationary and driven milling/drilling heads.



5 CONTROL UNIT

- Ergonomically arranged on the right from the working area
- Swivel action
- Adjustable height
- Side-to-side movement (version 1300)
- SINUMERIK 840D-sl or FANUC 31iB with 15" colour screen
- Comprehensive machining cycles
- 3D simulation
- USB and Ethernet interface

6 COUNTER SPINDLE

- A2-6 (A2-8) spindle nose
- Integrated, water-cooled spindle motor
- High drive power 29 kW
- High torque 250 Nm
- Large speed range 0-5000 (4000) rpm
- Incl. coolant-fed parts ejector
- Optional with Ø 65 (76/95) mm through hole for shaft unloading

7 CHIP CONVEYOR

- Hinged type conveyor belt
- Ejection height 1200 mm
- Integrated coolant tank 400/450 l
- Turret pumps: 2 x 14 bar
- Flushing pumps: 2 x 3.7 bar

8 AUTOMATIC WORK PIECE PICK UP DEVICE

- Optional arranged on the right in the working area
- Universally on Main- and Counter spindle applicable
- Including along-integrated prefabricated part buffering belt



Sprocket adapter
(Aluminium 7075)



Tappet
(Steel 16 Mn Cr 5)

HYPERTURN 65-1

1 MAIN SPINDLE

- Integrated, water-cooled spindle motor
- Spindle nose A2-6 (A2-8)
- High drive power 29 (37) kW
- High torque 250 (360) Nm
- Large speed range 5000 (4000/3500) rpm
- Bar capacity diameter 65 (76/95) mm

2 TOOL SYSTEM 1 / 2 / 3


- 12-station tool turret
- VDI30 (VDI40) quick-change system
- 12 driven tool stations
- Optional with BMT55P turret
- Servo-controlled
- Rigid tapping
- Polygonal turning, tec.

3 Y-AXES 1 / 2 / 3

- Travel +/- 50 mm
- Stable, compact construction
- Largely spaced guide ways
- Wedge-style design

4 WORK AREA

- Large spindle distance 1300 mm
- Optimum accessibility
- Straight chip drop
- Stainless steel covers and linings
- Tailstock/steady rest function on lower turret

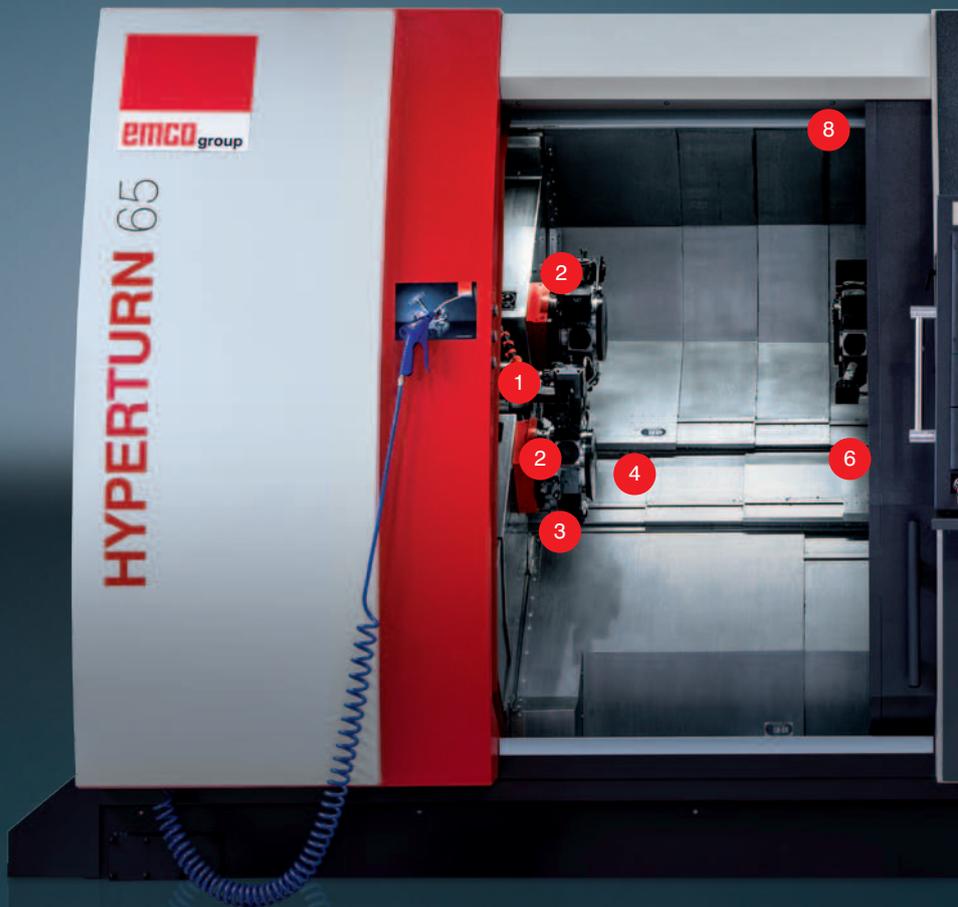

Machine with optional equipment



Shaft stub
(Steel 16 Mn Cr 5)



Shaft journal
(Steel 16 Mn Cr 5)

300 TRIPLETURN

The HYPERTURN as TRIPLETURN version has an additional 12-station turret. This serves as a „Joker“ on the one hand to reach a better productivity and on the other hand to increase the flexibility when machining complex parts in one clamping cycle. This means that generally three tools are in use simultaneously, which reduces part production time by up to 30%.



5 CONTROL UNIT

- Ergonomically arranged on the right from the working area
- Swivel action
- Adjustable height
- Side-to-side movement
- Sinumerik 840D sl with 15" colour screen
- Comprehensive machining cycles
- 3D simulation
- USB and Ethernet interface

6 COUNTER SPINDLE

- Integrated, water cooled spindle motor
- Spindle nose A2-6 (A2-8)
- High drive power 29 kW
- High torque 250 Nm
- Large speed range 0-5000 (4000) rpm
- Incl. coolant-fed parts ejector
- Optional with \varnothing (76/95) mm through hole for shaft unloading

7 CHIP CONVEYOR


- Hinged type conveyor belt
- Ejection height 1200 mm
- Integrated coolant tank 450 l
- Turret pumps: 3 x 14 bar
- Flushing pumps: 2 x 3.7 bar

8 AUTOMATIC WORK PIECE PICK UP DEVICE


- Optional arranged in the right in the working area
- Universally on Main- and Counter spindle applicable
- Including along-integrated prefabricated part buffering belt




Distributor
(Brass)




Sensor housing
(Brass)

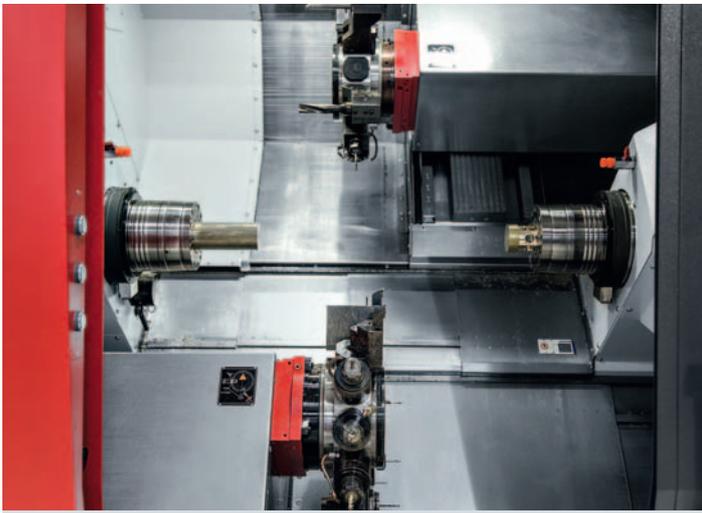

Tool turret. Fast 12-station servo turret with very short switching times for standardized VDI30 or VDI40 tools. All stations can hold driven tools for drilling, milling, and tapping. The operator is able to control the indexing speed with the override switch at any time.

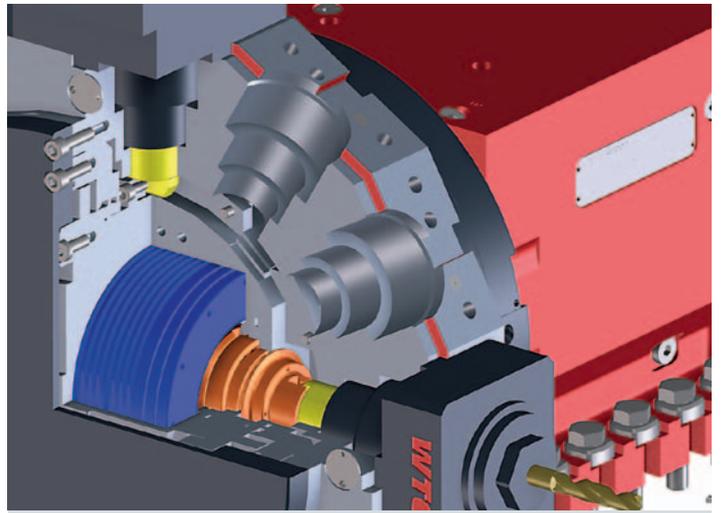


BMT-turret. For economical production of complex turned/milled parts with mainly milling share, there is optional the BMT-turret with water cooled direct drive. With max. 12000 rpm, 30 Nm and 10 kW, this turret offers optimal prerequisites for the complete machining.

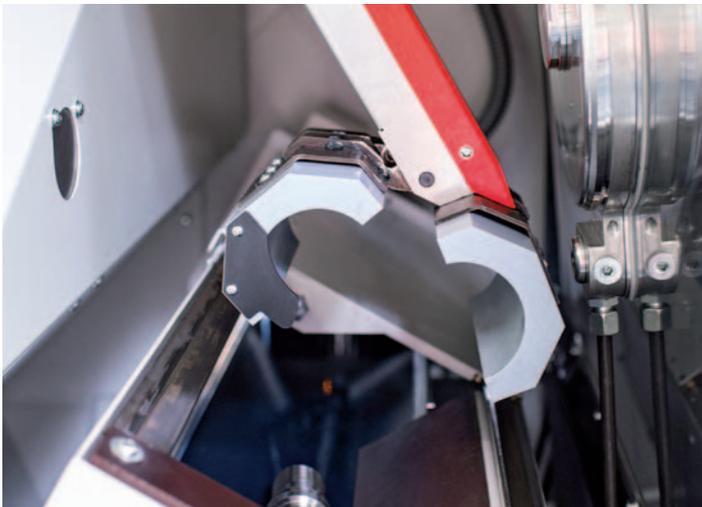


Parts catcher. The HYPERTURN 65's electro-pneumatic parts catcher is controlled using M functions. When needed, it traverses to the front of the work area and pivots to the spindle center. The finished part is removed from the clamping device and transferred to the catcher tray. The parts catcher then moves back to its initial position and the part is tipped onto a conveyor belt.

HYPERTURN 65 Technical

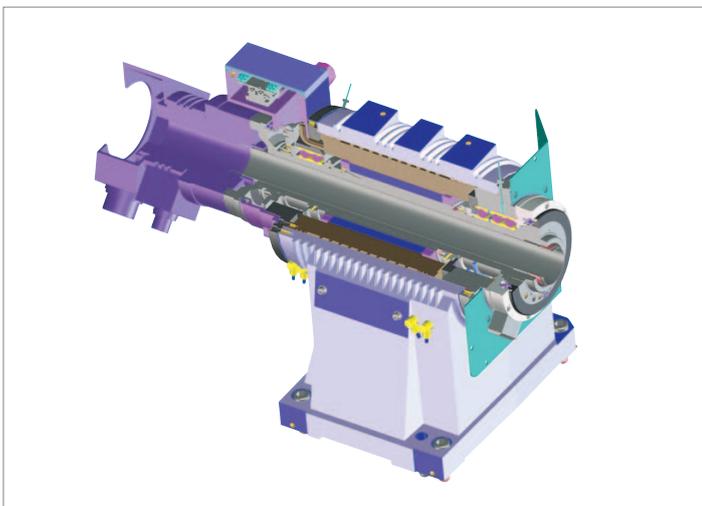


Integrated spindle motor (ISM). The latest synchronous technology guarantees the highest dynamics and exceptional torque in a compact design. Liquid cooling in conjunction with automatic temperature control maintains a constant temperature for all spindle motors.

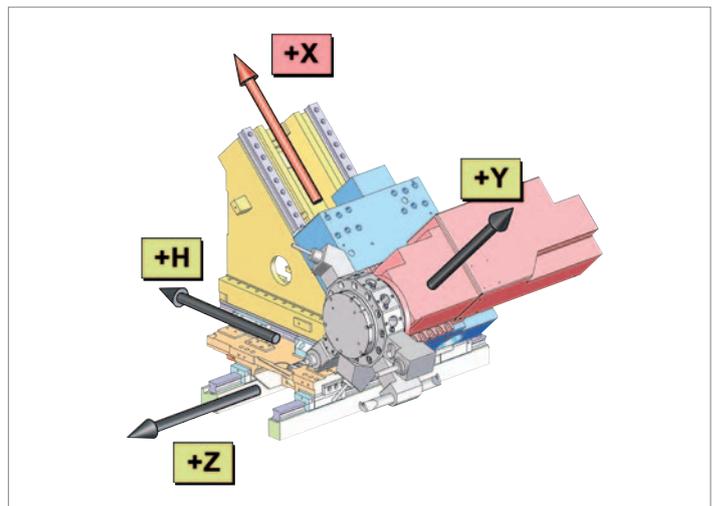

High-precision Y-axis. The HYPERTURN's Y-axis is designed to distribute the cutting forces over two guide planes. The result: outstanding rigidity for all turning and milling operations. The +/- 50 mm travel permits off-center milling and drilling.



Prefabricated part conveyor belt. On the conveyor belt with in the machine casing, arranged lengthwise, with a storage surface of 1400 x 180 mm, the work pieces are put down damage free.

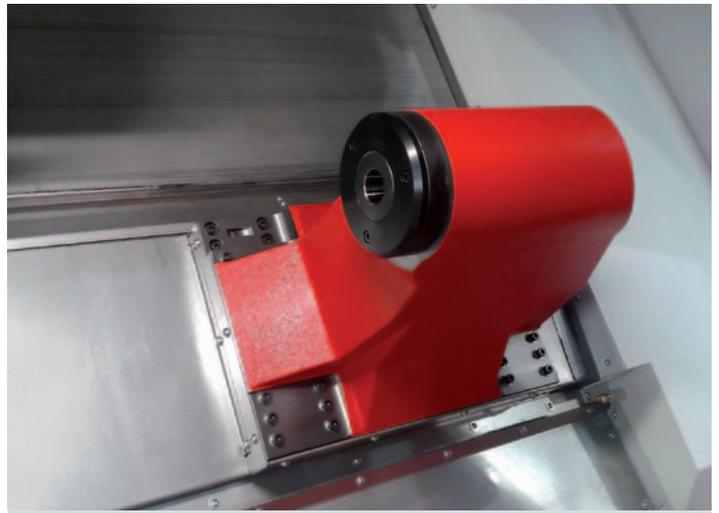

Tailstock. For shaft-type application, the HYPERTURN 65 offers two tailstock-versions. On the one hand an universal, hydraulic movable tailstock for manually loaded machines and on the other hand an NC-tailstock for fully automatic loaded machines. With the advantage of very short idle times.


Highlights

Highlights


- 2 high performance and water cooled spindle motors
- 2x / 3x 12-times turret with VDI 30 / 40 quick-change system
- Optional with BMT-turrets and direct drive up to 12 000 rpm
- 2 / 3 Y-axes for processing of complex turned/ milled parts
- Bar stock feed up to \varnothing 95 mm
- Optimum chip flow and user-friendly work area
- SINUMERIK 840D-sl or FANUC 31iB according to customers choice
- Made in the Heart of Europe



Live-center / turret-steady-rest. For complete machining of shaft work on the one hand in the main spindle and on the other hand in the sub-spindle, there are a live center and if needed also a turret steady rest available. So that long, slim workpieces can be manufactured precisely and without chatter marks.

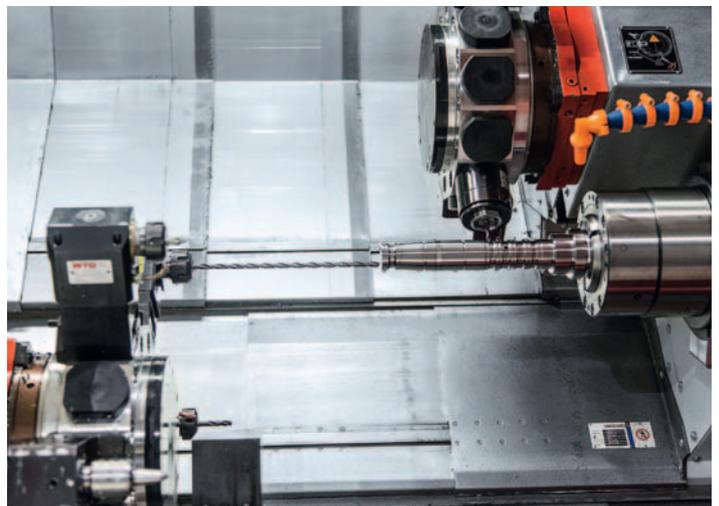


Deep hole drilling. For the processing of deep holes, high pressure cooling installations up to 80 / 150 bar with filtration and coolant temperature control are available. Internal coolant supply with stationary but also driven tool heads ensure a save cutting process.

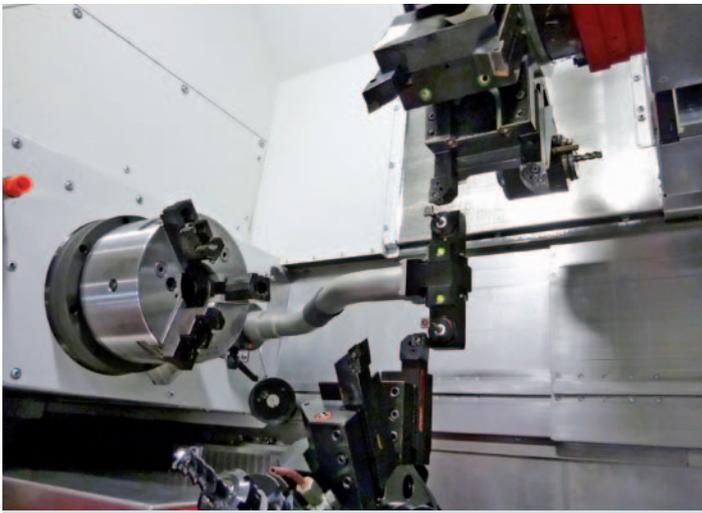

Tool measuring. The tool measuring arm equipped with two touch-probes enables fast and precise measuring of tools in the workspace. It is mounted manually in the bracket below the main spindle and returned to a storage tray after use.




Control. The Sinumerik 840 D sl with operate user interface is ergonomically arranged on the right from the working area, can be swiveled 80° and changed in height by 100 mm. A side-to-side movement is standard for the 1300 versions. On the bottom is a 230 Volt socket, which can be used for any electrical device.

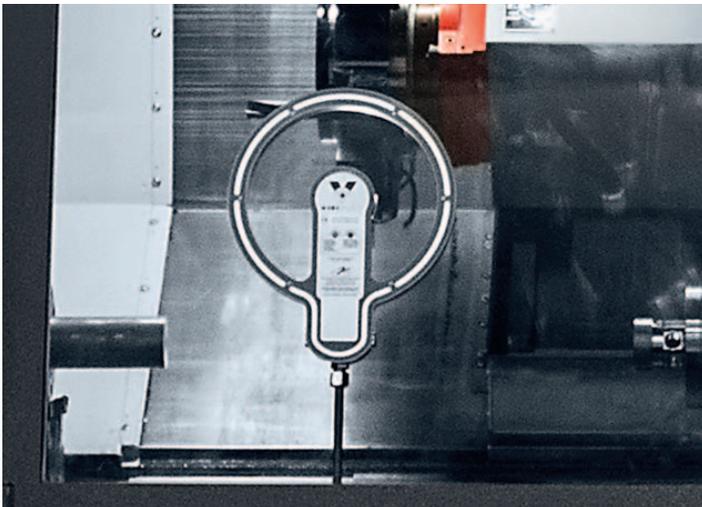

Spin window. The optional spin window enables the optimal insight in the working area, also during machining with coolant. Due to its very fast rotating glass plate, the coolant is slung away immediately after impact and the window stays clear.

HYPERTURN 65 Technical

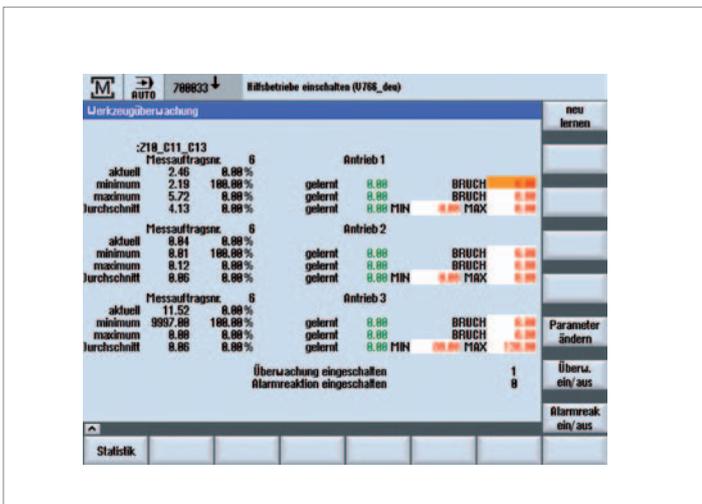


EMCO tool monitoring system. The tool status is monitored by evaluating the load on the various axis drive motors. Excessive loads point to tool wear or breakage. Too low a load indicates a tool is missing.




For series production of turning/milling parts made of aluminum, brass, steel or grey cast iron offers a paper-band filtration unit. With it the coolant volume and also the life span of the cooling lubricant increases.

Work area HT65-Duoturn

The HT65-Duoturn is available with two bed-lengths. Once with a distance between spindles of 1050 mm and once with 1300 mm. The shorter one is dedicated for shorter components, achieving shorter idle times. The longer version can be used to produce long shaft-type components using a steady-rest mounted at the turret but also using a full CNC-steady-rest instead of the lower tool turret. Also in case of machining deep holes at both ends of the components, the HT65-Duoturn is perfectly predestinated. Both turrets are mounted face-to-face. So long I.D. tooling can be used facing the main and counter spindle.

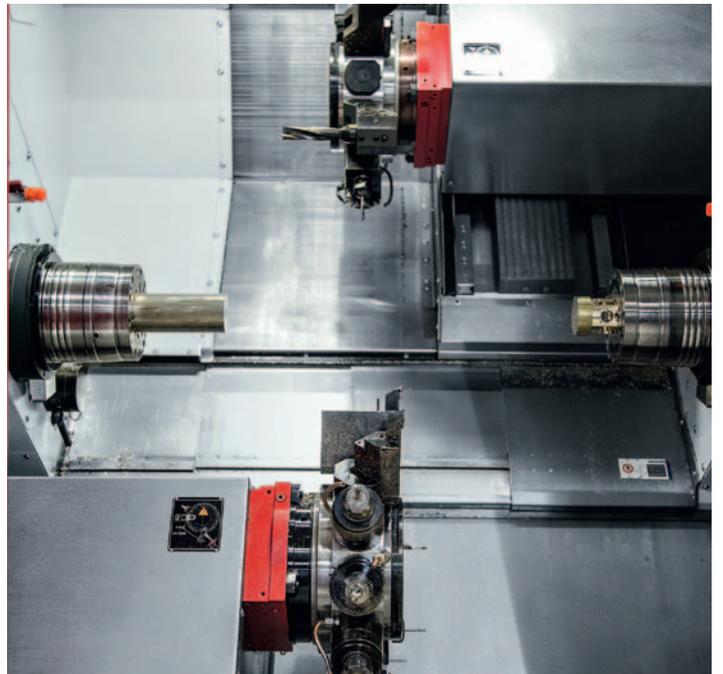


Highlights

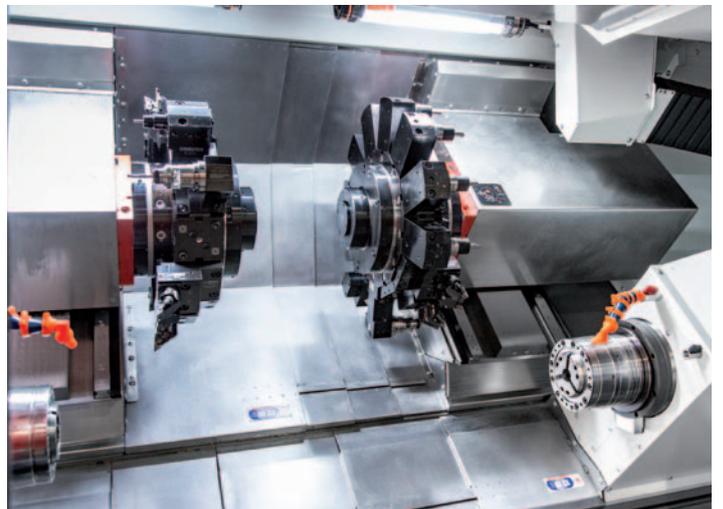


BMT turret. The stable BMT-55P interface replaces the standard VDI quick change system. This allows coolant pressures of up to 150 bar to be implemented through the turret. Further advantages are in the accuracy and stability of the interface.

Work area HT65-Tripleturn

The HT65-Tripleturn offers the largest work envelope in its class with a distance between spindles of 1300 mm and large X-axis strokes. So the machine can not only be used for bar work but also to machine larger chucking components. Chucks up to a diameter of 250 mm can be used without limitations at the main and counter spindle. Also there is plenty of power available at both spindles to run chuck work.

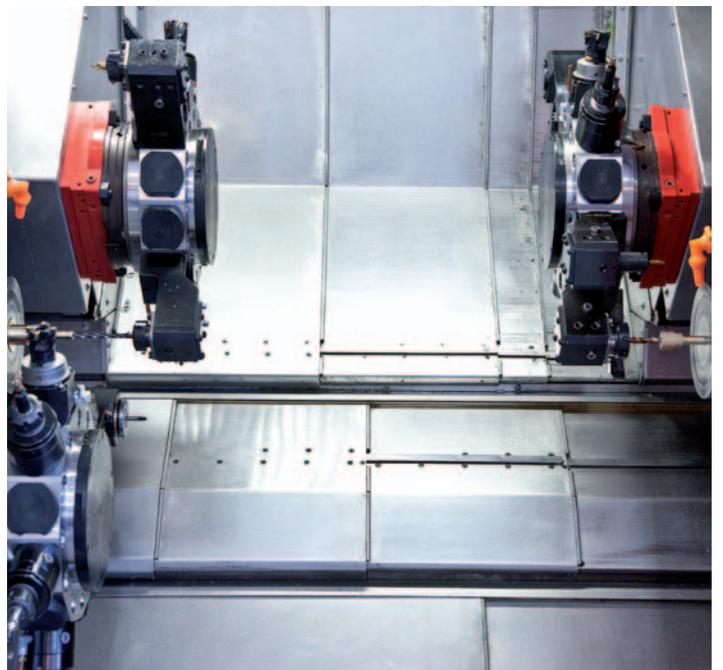


Workspace HYPERTURN 65-1000 Duoturn with BMT55P

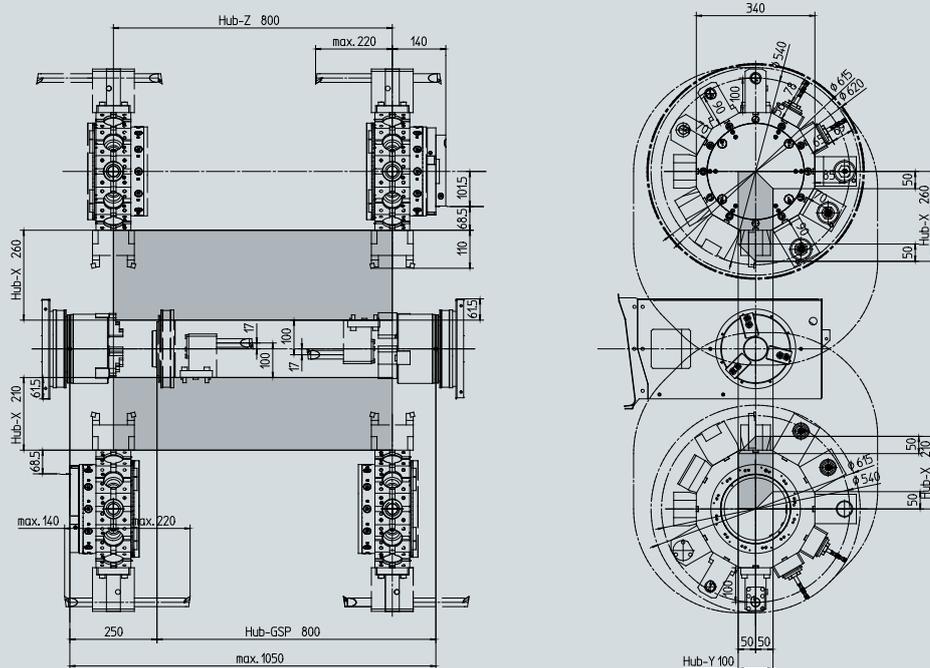


Indications in millimeters

Machine layout HYPERTURN 65-1000 Duoturn

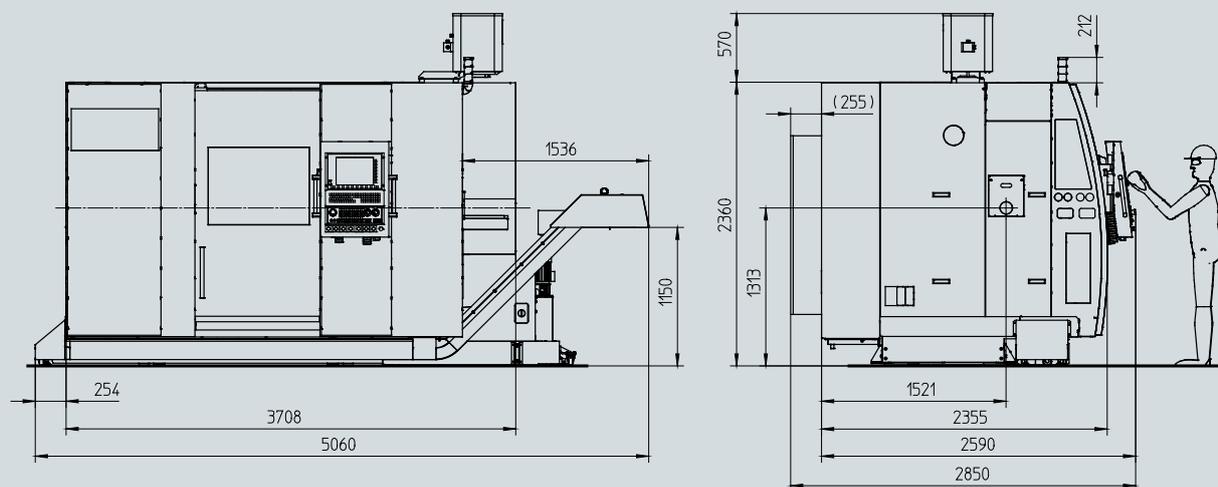


Indications in millimeters

Workspace HYPERTURN 65-1300 Duoturn with VDI30

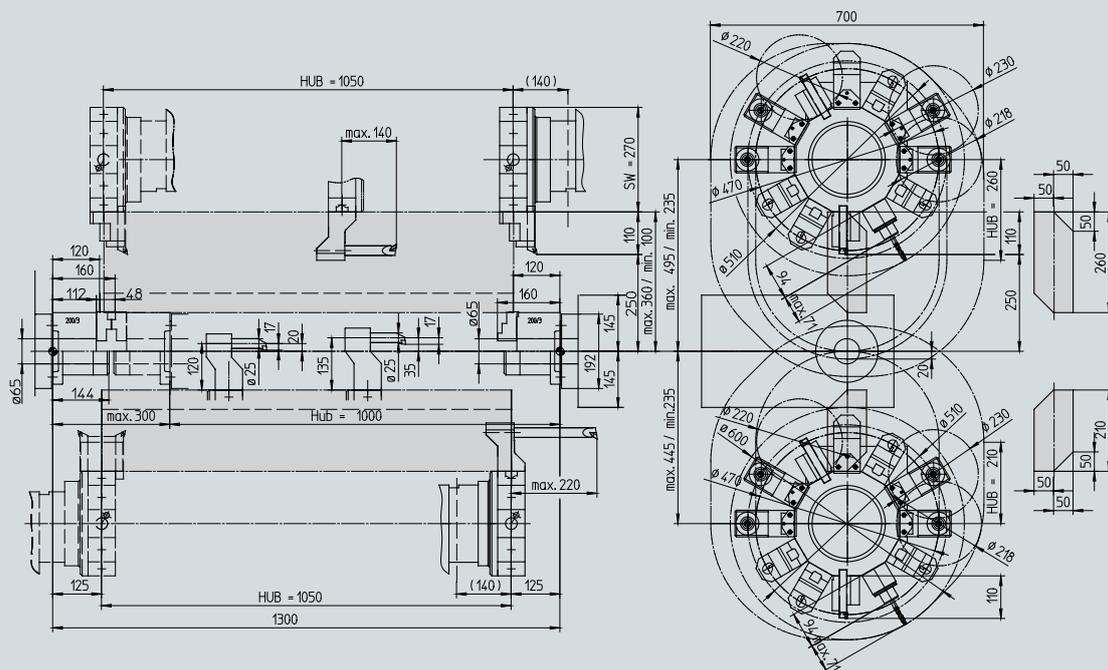


Indications in millimeters

Machine layout HYPERTURN 65-1300 Duoturn / Tripletturn

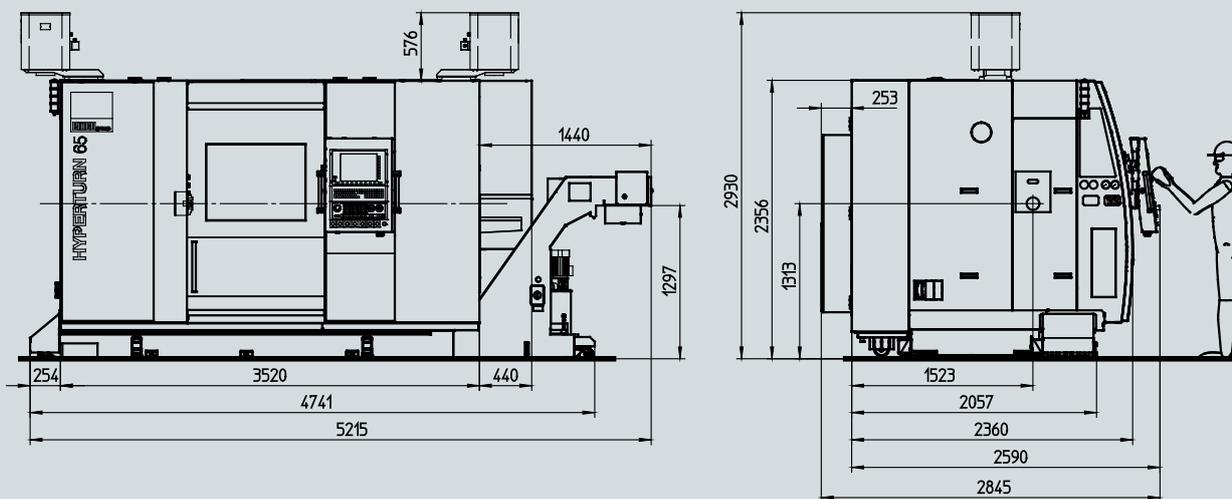


Indications in millimeters


Performance HYPERTURN 65 main and counter spindle \varnothing 65/76 mm

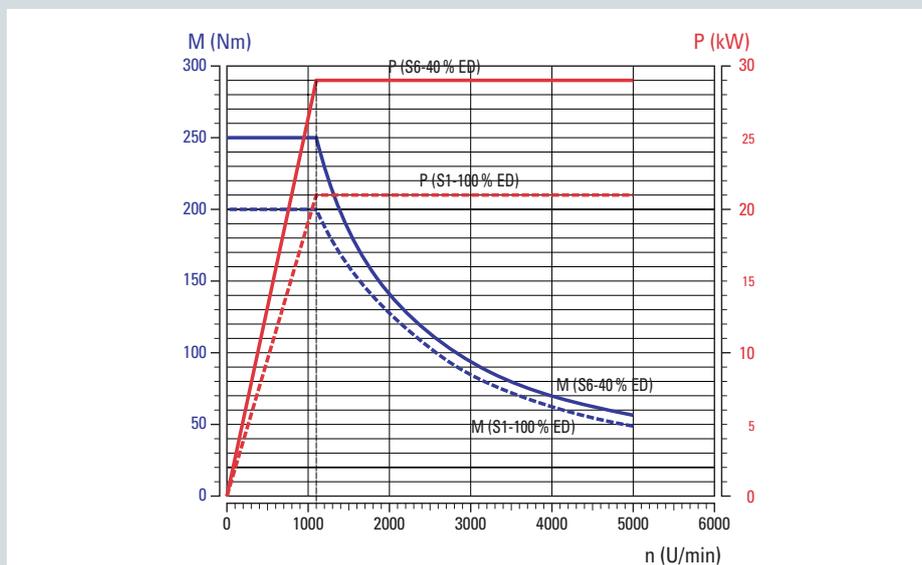


Performance Tool turret - driven tools VDI 30/40

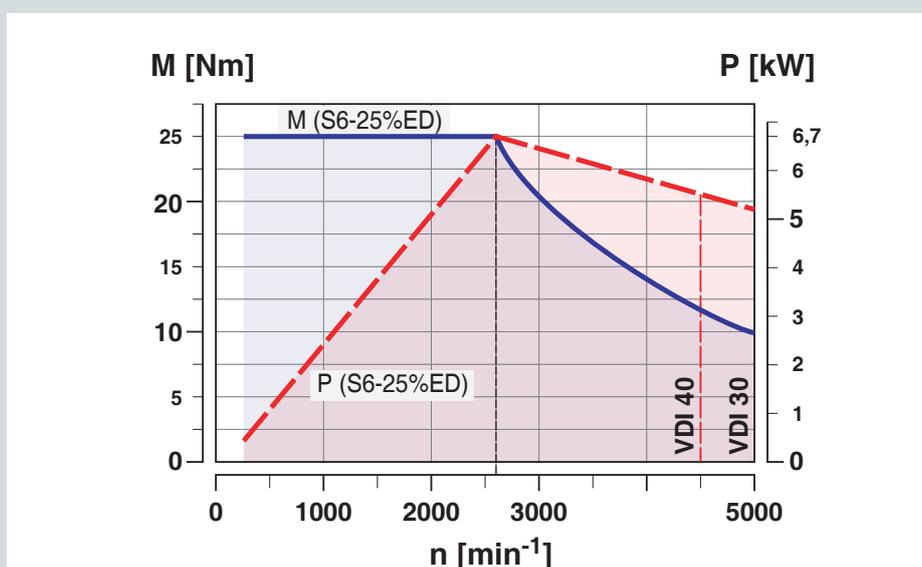

Performance HYPERTURN 65 main spindle \varnothing 95 mm

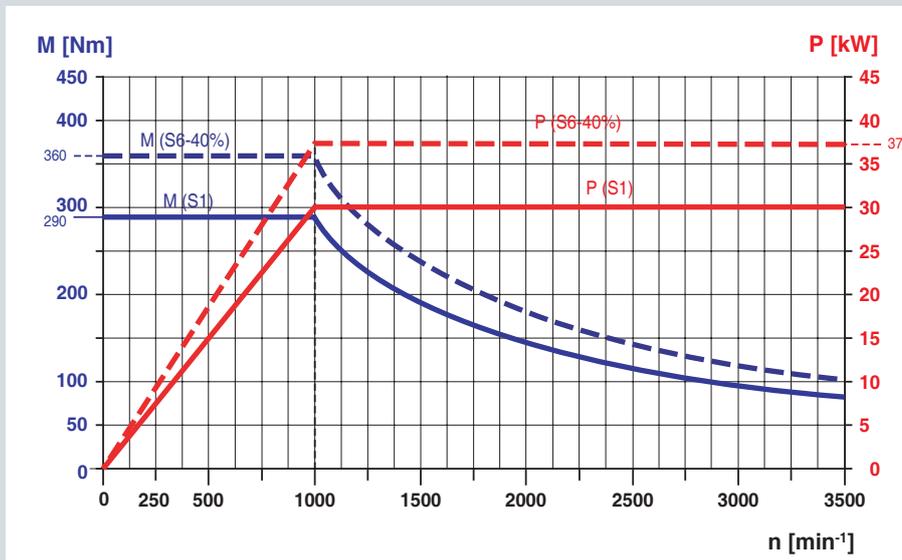


Performance Tool turret - driven tools BMT55P

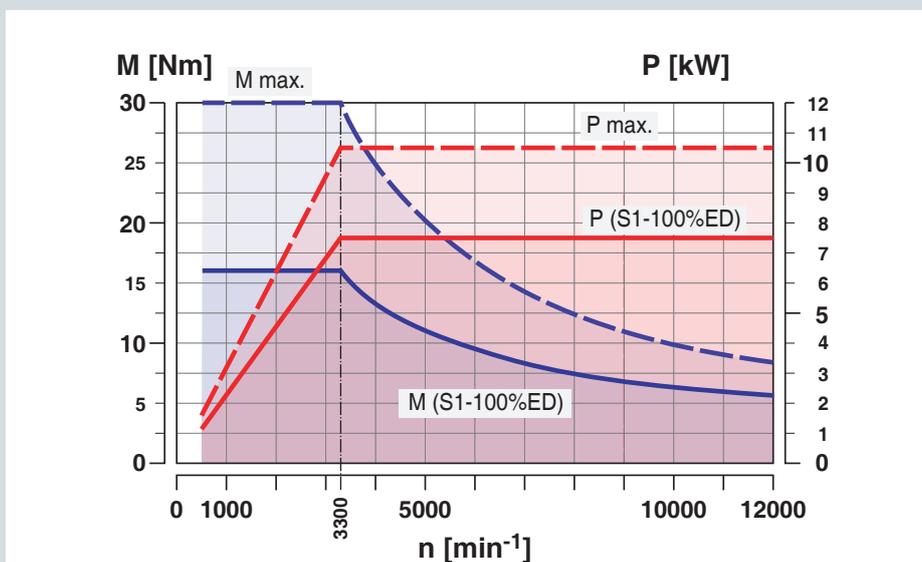

The EMCO gantry loader. Individual process optimization.

1 GANTRY LOADER

2 PALLET MAGAZINE (20-station)

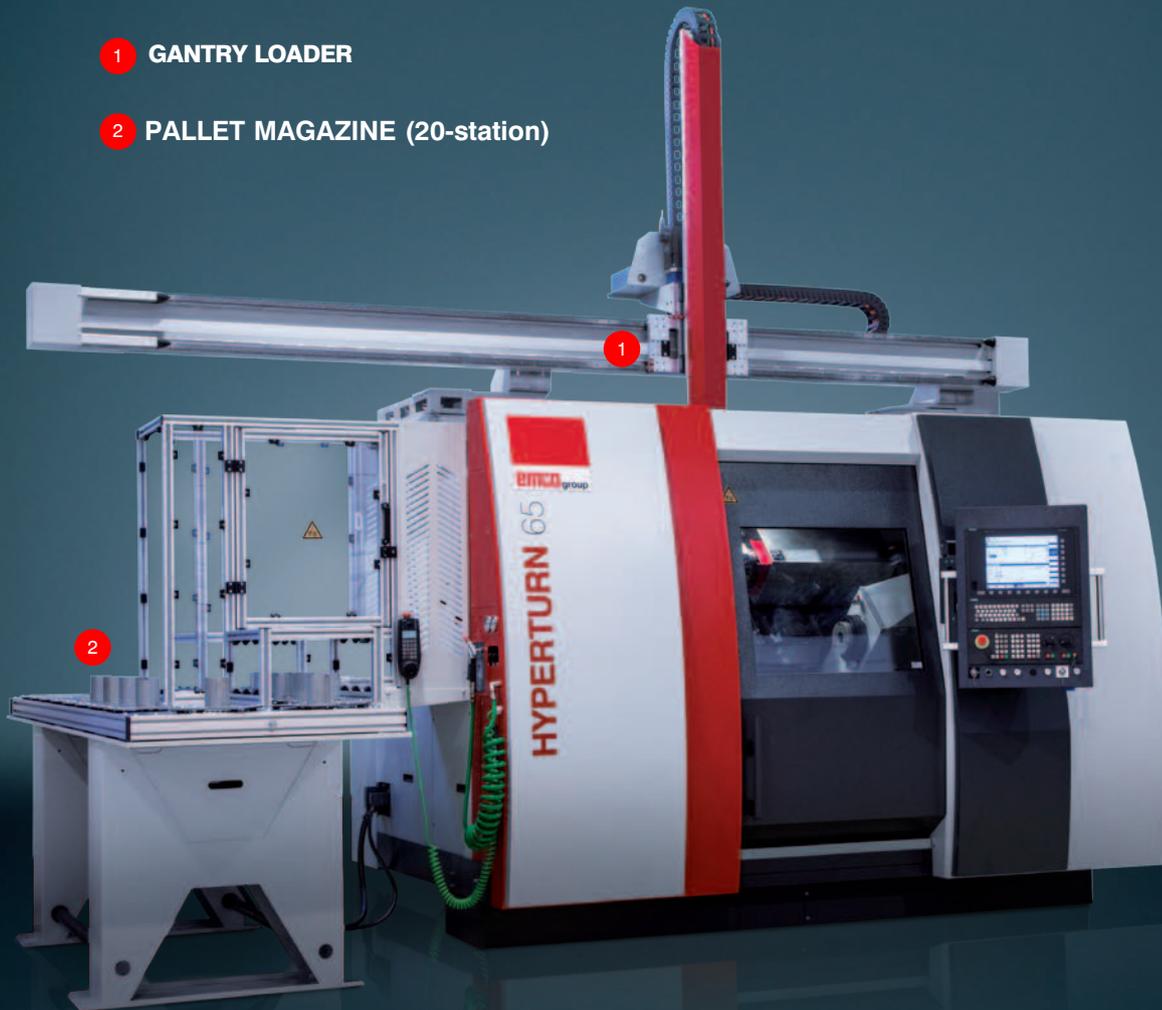

Advantages

- Fully automatic loading and unloading of the workpieces
- Multi-channel Sinumerik control incl. user cycles
- Seamless interplay between the machine tool and the loading device
- Varied possibilities of customer-specific adaptation
- Possibility of integration of measuring station, signing station, cleaning station, etc.
- Short spare time due to a load

Automatic Return on Investment

Workpiece magazine

Blank-specific pallet attachments enable oriented loading of blanks into the machine and increase the parts stock for unmanned production. Changeover times are reduced or eliminated thanks to the perfect adjustment to the customer's parts.



4-station pallet attachment for tees



6-station pallet attachment for articulated brackets



Multi-pallet attachment for a family of parts



4-station pallet attachment for valve caps



20-station pallet magazine with customer-specific pallets



2x3-jaw double gripper head



4x3-jaw gripper head



Shaft gripper head

EMCO Bar loader




EMCO short bar loader. In view of the ever-increasing pressure on floorspace for machines, EMCO has developed the most compact short loader on the market: the EMCO SL1200.



EMCO Top Load 10-65. 3-metres of bar material may be loaded into the machine in a fully automated way. Multi-Level material supports enable unmanned operation for an even longer period of time.

Quality Components

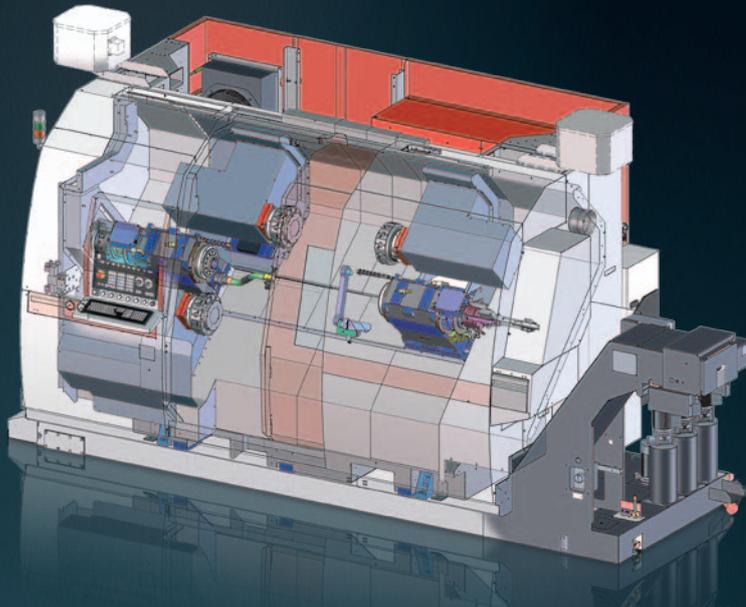

Coolant pumps

Low-maintenance immersion pumps for pressures of up to 25 bar and flow rates of up to 1500 l/min provide optimum conditions for machining and enable reliable chip transportation.



Clamping cylinder / chuck

Hydraulically activated clamping cylinders and chucks guarantee the precise, safe clamping of work pieces. Programmable sensors are used for stroke monitoring. There is no need for time-consuming adjustments of contactless limit switches.



Tool holder

Innovative, fully developed tool holder systems form the basis for cost-effective machining. High changeover accuracy and stability result in short setup and cycle times.



Headstocks

The design and manufacture of headstocks are two of EMCO's core competencies. During engineering, the focus is on precision, robustness, high rigidity, precise rotational characteristics, and a long service life.



Hydrauliksysteme

Kompakte Abmessungen, geräuscharmer Betrieb und hohe Energieeffizienz gehören zu den Vorteilen der von EMCO verwendeten Hydraulik-Aggregate. Nachgeführte Druckschalter ersparen aufwändiges, manuelles Justieren der Drücke.



Machine bases and slides

When matching components, we place great value on high stability, good damping characteristics, and a thermoneutral design. We achieve high stability through a shorter force flow, thermal stability through symmetry, and dampening through the materials and interfaces selected.



Tool turret

Rapid-indexing turrets with adjustable swivel speeds and milling drives represent the current state of the art. The backlash-free milling drive is not only ideal for milling and drilling, but also for rigid tapping, hobbing, and polygonal turning.



Ball screws and roller guides

Highly precise and generously dimensioned guide rails and ball screws with optimal pretensioning form the basis for the machining of precision parts.



Chip conveyor

Slat band conveyors allow for flexible implementation and the safe removal of chips. A monitored overload clutch prevents damage from improper use.

Minimum use of resources for maximum profit.




At EMCO, we take a consistent, responsible approach to the use of resources in machine tools in order to safeguard long-term investments. From the development of our machines through to their construction and manufacture, we place a strong focus on the sensible and sparing use of raw materials and energy. This enables us to achieve parallel savings in two areas:

1. Reduction in the basic power consumption of machine tools, e.g. assemblies are switched on and off as required and the installed connected loads are kept to a minimum.
2. Reduction in variable consumption: This can be seen in the lighter axes, energy recovery system, increased rate of good parts, and the shorter process chain enabled by complete machining.

Through these measures, which are constantly being refined and further optimized, EMCO truly demonstrates that its slogan of „Designed for your Profit“ is not just an empty promise: EMCO products help save the environment and provide intelligent customer savings without compromising on quality and flexibility.

[Regenerative drive system]

Kinetic energy is converted into electrical energy and fed back into the grid.
Savings of up to 10%

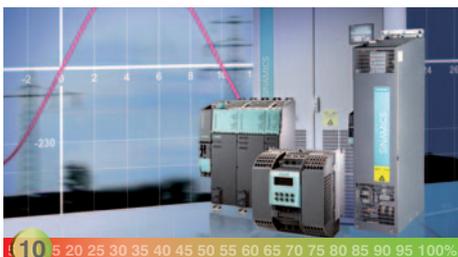

[Compact hydraulics unit with pressure accumulator]

Thanks to its accumulator charging system, the pump only runs when required. If the pressure accumulator is full, the pump switches over to closed loop circulation.
Savings of up to 90%




[Roller guides]

Extremely low friction losses thanks to rolling friction. Highly dynamic performance with minimal lubricant consumption.
Savings of up to 50%



[Structurally optimized mechanics]

FEM analysis is used to optimize the relevant components in terms of their rigidity while simultaneously reducing their weight.
Savings of up to 10%

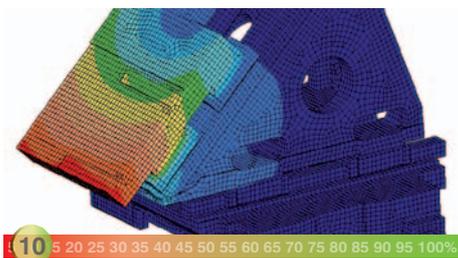


[Highly efficient motors]

The use of energy-efficient motors (IE2) in the coolant preparation area guarantee highly cost-effective operation.
Savings of up to 10%



[Synchronized chip conveyor]

Programmable interval times enable optimal use of the chip conveyor independently of the machining process.
Savings of up to 95%

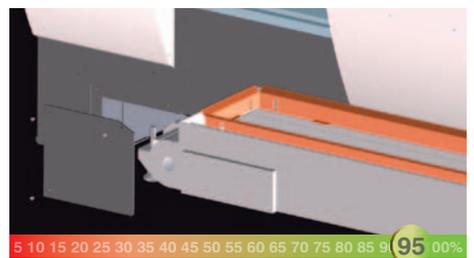


[Intelligent standby concepts]

Reduced consumption by automatically switching off ancillary units and machine space/screen illumination after a defined period of inactivity on the control panel.
Savings of up to 50%




[Virtual machine]

Significant reduction in the setup and running-in times on the machine through the use of highly developed simulation and programming software.
Savings of up to 85%

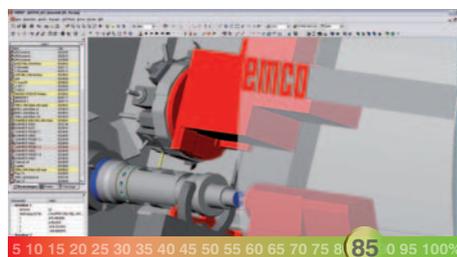

[Intelligent energy management]

Intuitive data entry screens for activating the individual energy-saving functions.
Savings of up to 70%

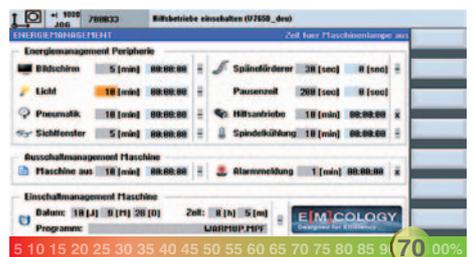



DASHBOARD – For a Quick Overview of the Machine Status

Clear and compact processing of all relevant machine and NC data depending on the configuration of the machine (number of tool systems, spindles, ...) and the active operating mode (JOG, MDA, AUTO). Know at a glance whether everything is OK or whether the machine operator will be required to interact.




emcoCONNECT's hardware basis is a 22" industrial touch control panel combined with an industrial PC (IPC).

Highlights

- Direct interaction between EMCO Apps and the control
- Intuitive user interface optimized for touch control
- Range of available applications is continuously being expanded
- Customised and project-specific applications
- Optimized for the EMCO machine range
- emcoCONNECT allows for easy and quick configuration and updating

er“ for fire production flow

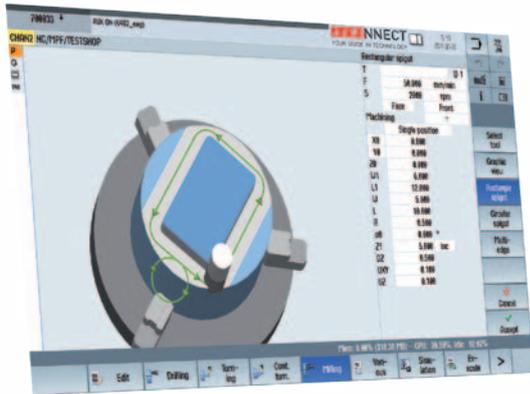


SINUMERIK - the Control and the Machine's Centerpiece

Thanks to the App Launcher operators may switch between the emcoCONNECT Apps and the control at any time. All it takes to do so is a click on the emcoCONNECT logo. To improve the work processes on the machine the control can, as shown in the picture, be operated in full screen mode or in interaction with practical apps (sidebar).

MACHINE DATA – All Data related to Productivity at a Glance

Operating data collection to inform the user about the current production status and OEE (Overall Equipment Effectiveness) values full screen or sidebar.

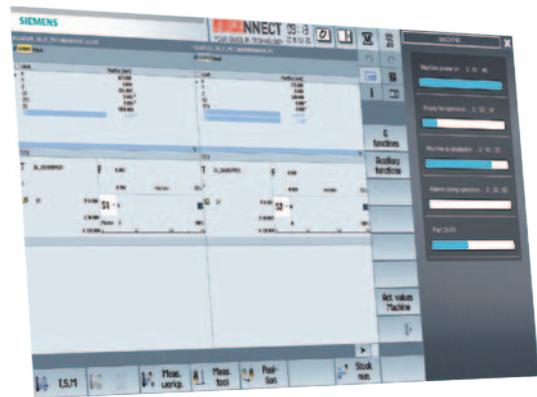


DOCUMENTS – A Digital and Expandable Document Collection Customised to Suit Your Individual Needs

To display PDF documents such as machine documentations, programming instructions, process descriptions ... Including favourites management - full screen or sidebar

Virtual workflow.

Real benefits.

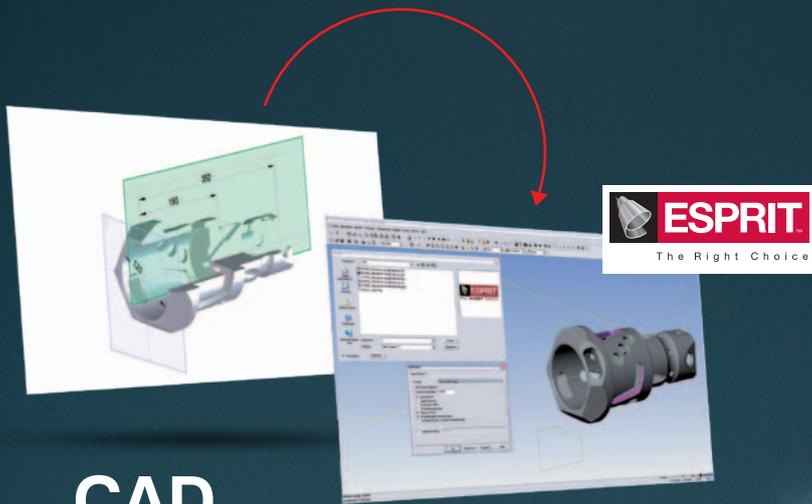



CAD

Direct CAD data import

- AutoCAD (DWG)
- Parasolid®
- Solid Edge®
- Solid Works®
- ACIS® (SAT)
- Optional interfaces: CATIA®, Pro/ENGINEER®, STEP, STL,...

CAM

- 2-22 axis turning
- 2-5 axis milling
- Multi-tasking of turning and milling
- 3D machine space simulation
- Certified post-processors

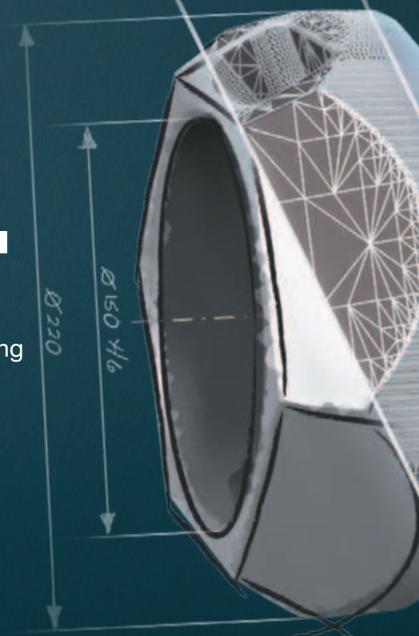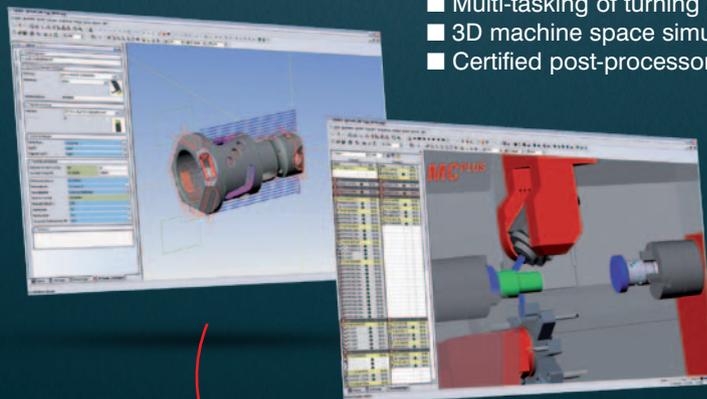

fits.

The Esprit CAM system offers high flexibility and process security, a comprehensive selection of machining cycles, maximum tool control, and cross-machine technology for your entire production facility. EMCO CPS Pilot provides for a 1:1 mapping of the real machine for defining and testing processes, optimizing machining sequences, and training new operators.



CPS

- 1:1 simulation with collision detection
- Direct connection to CAM ESPRIT
- Process optimization
- Reverse simulation of existing NC codes
- Reduction in scrap rates
- Training on the virtual machine
- Simulation of loading systems (e.g. EMCO gantry loader)

emcoCPS | Pilot
Die virtuelle Maschine

Production

- Reduction in set-up costs
- Reduction in downtimes
- Reduction in repair costs
- Optimum machine utilization



HYPERTURN 65

Technical Data

Work area

Swing over bed	660 mm (26.0")
Swing over cross slide	540 mm (21.3")
Distance between spindle noses	1050 / 1300 mm (41.3 x 51.2")
Maximum turning diameter	500 mm (19.7")
Max. part length	750 / 1000 mm (29.5 x 39.4")
Max. bar-stock diameter	65 (76.2/95) mm (2.6") (3.0") (3.7")

Travel

Traverse path X1 / X2 (HT65 DUOTURN)	260 / 210 mm (10.2 / 8.3")
Traverse path X1 / X2 / X3 (HT65 TRIPLETURN)	260 / 260 / 210 mm (10.2 / 10.2 / 8.3")
Traverse path Z1 / Z2 (HT65-1000 DUOTURN)	800 / 800 mm (31.5 / 31.5")
Traverse path Z1 / Z2 (HT65-1300 DUOTURN)	1050 / 1050 mm (41.3 / 41.3")
Traverse path Z1 / Z2 / Z3 (HT65 TRIPLETURN)	460 / 460 / 1050 mm (18.1 / 18.1 / 41.3")
Traverse path Y-axes	100 (+/- 50) mm (3.9" (+ / -2.0"))

Main spindle

Speed range (infinitely variable)	0 – 5000 (4000/3500) rpm
Maximum torque	250 (250 / 360) Nm (184.4 265.5 ft/lbs)
Spindle nose DIN 55026	A2-6 (A2-8)
Spindle bearing (inside diameter)	105 (130 / 140) mm (4.1"(5.1")(5.5"))
Spindle bore (excluding draw-back rod)	Ø 73 (86 / 106) mm (2.8" (3.4")(4.2"))

Counter spindle

Speed range (infinitely variable)	0 – 5000 (4000 / 3500) rpm
Maximum torque	250 (280) Nm (184.4 ft/lbs)
Spindle nose DIN 55026	A2-6 (A2-8)
Spindle bearing (inside diameter)	Ø 105 (130/140) mm (4.1" (5.1/5.5"))

C-axes

Resolution	0,001°
Rapid traverse	1000 rpm

Drive power

Main spindle (AC integrated-spindle motor)	29 (37) kW (38.9 (49.6) hp)
Counter spindle (AC integrated-spindle motor)	29 kW (38.9 hp)

Tool turret with VDI interface and direct drive

Number of tools stations	2 / 3 x 12
VDI shaft (DIN 69880)	30 (40) mm (1.2" (1.6"))
Tool cross-section for square-shank tools	20 x 20 (25 x 25) mm (0.8 x 0.8" (1.0 x 1.0"))
Shank diameter for boring bars	32 mm (1.2")
Tool indexing time	0,7 sec

Driven tools

Speed range	0 – 5000 (4500) rpm
Torque	25 Nm (18.4 ft/lbs)
Drive power	6.7 kW (9.0 hp)
Driven tools	2/3 x 12

Turret with BMT-interface and direct drive

Number of tool positions	2/3 x 12
Precision interface	BMT-55P
Tool cross-section for square tools	20 x 20 (25 x 25) mm (0.78 x 0.78 (0.98 x 0.98"))
Shank diameter for boring bars	40 mm (1.6")
Tool change time	0,5 sec.
Speed range of the driven tools	0 – 12000 rpm
Torque of the driven tools	30 Nm (22.1 ft/lbs)
Driving power of the driven tools	10 kW (13.4 hp)

Feed drives

Rapid speed X1 / X2 / X3	30 m/min (1181 ipm)
Rapid speed Z1 / Z2 / Z3	30 m/min (1181 ipm)
Rapid speed Y1 / Y2 / Y3	12 m/min (472 ipm)
Feed force X1 / X2 / X3	5000 N
Feed force Z1 / Z2 / Z3	8000 N
Feed force Y1 / Y2 / Y3	7000 N

Tailstock

Traverse path	800 / 1050 mm (31.5 / 41.3")
Max. contact force	8000 N
Inner cone for live-centre	MK 4

Coolant system

Tank capacity	400 / 450 l (105 / 118 gal)
Pump capacity	2 / 3 x 2,2 kW (2.7 / 4.0 x 2.9 hp)

Power consumption

Connected load	50 kVA
Compressed air	6 bar (87 PSI)

Dimensions

Height of center above floor	1300 mm (51.2")
Overall height	2360 mm (92.9")
Required space L x D (with chip conveyor)	5060 / 5300 x 2850 mm (199.2 / 208.7 x 112.2")
Total weight	9500 kg (20943.9 lb)

Safety devices (approximately) CE compliant